


TRAY ERECTOR



www.tfreemantle.com

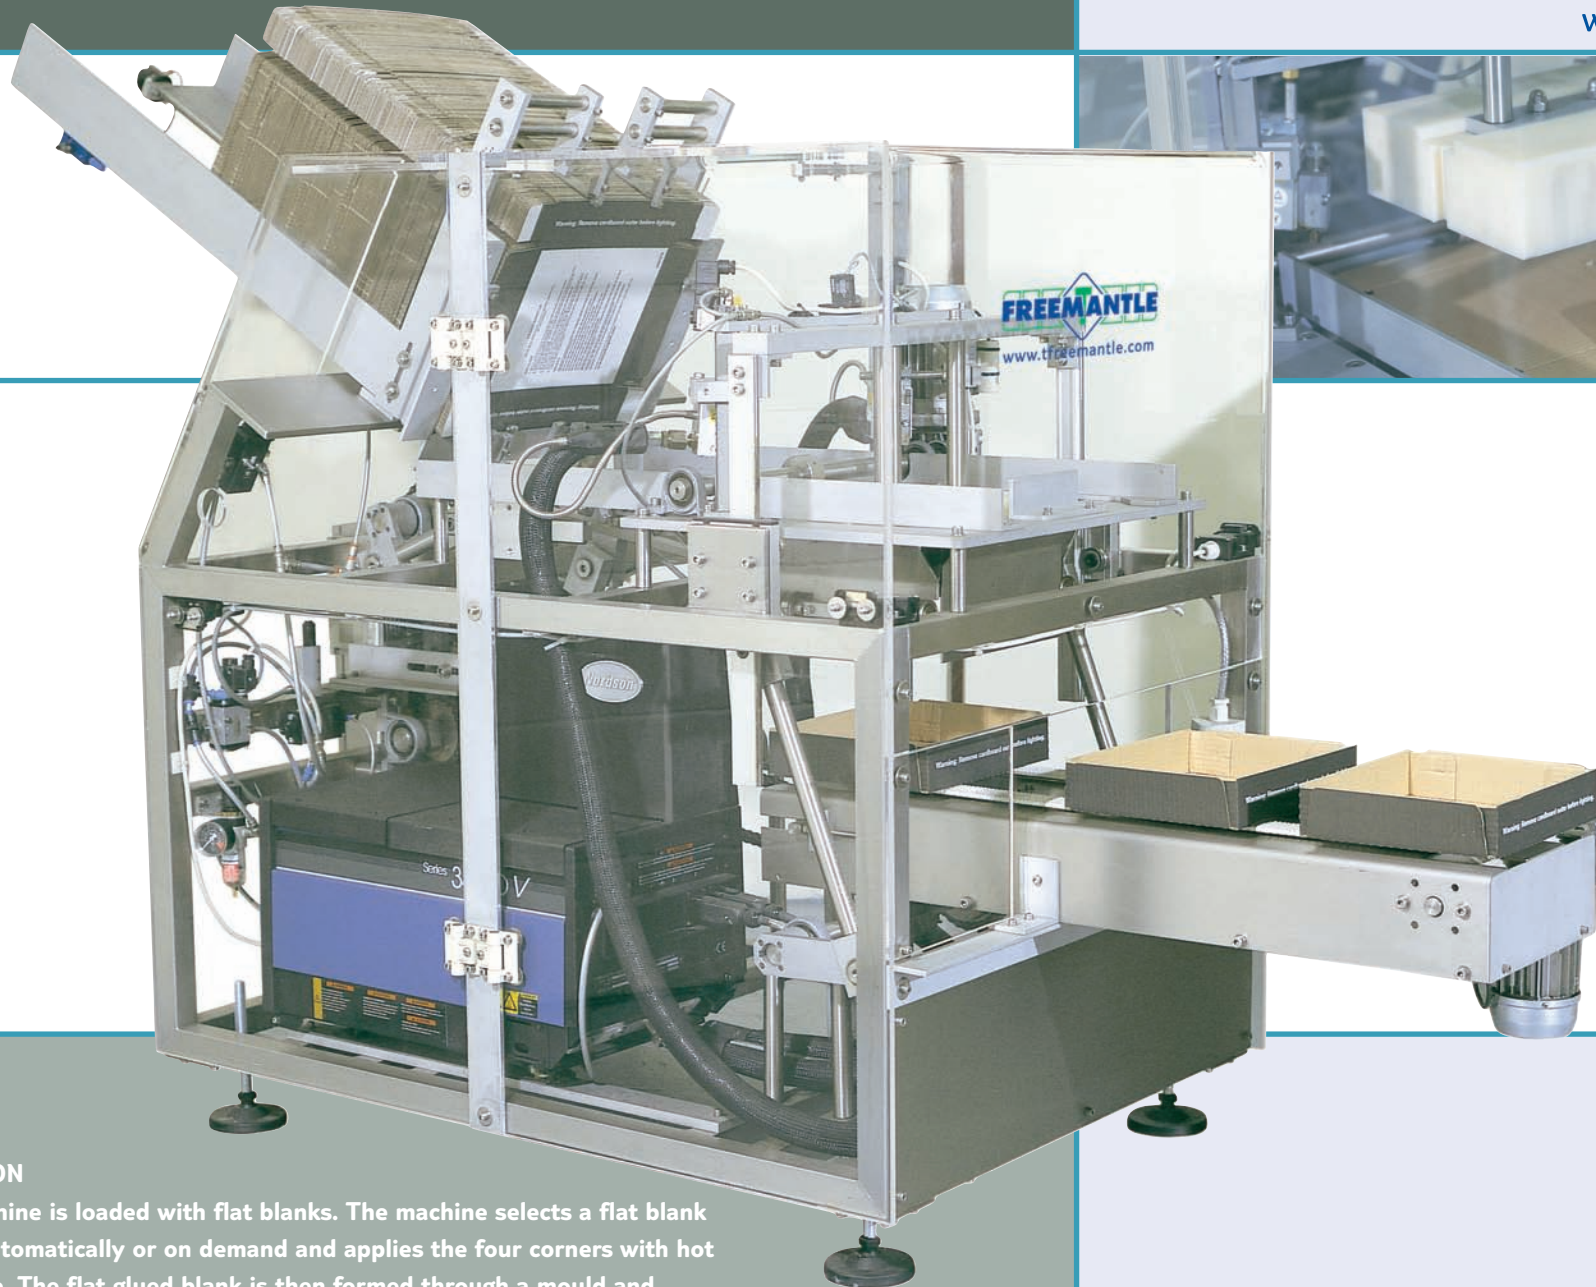

FUNCTION

The machine is loaded with flat blanks. The machine selects a flat blank either automatically or on demand and applies the four corners with hot melt glue. The flat glued blank is then formed through a mould and deposited out of the bottom on to a conveyor or chute.

TRAY ERECTOR





www.tfremantle.com

Technical Details

Electrical requirements	Supplied with a 3 metre armoured cable complete with a BS 4343 plug for connection to a single phase 16 amp supply
Compressed Air	Supplied with filter regulator with 8mm push in fitting for connection to 80psi/5.5 bar compressed air supply
Lifting weight	750 kilos. Ideal lifting points marked for fork truck offloading
Adhesive type	Standard packaging grade Hot Melt or Coolmelt glue

Alternative specifications available for worldwide installations

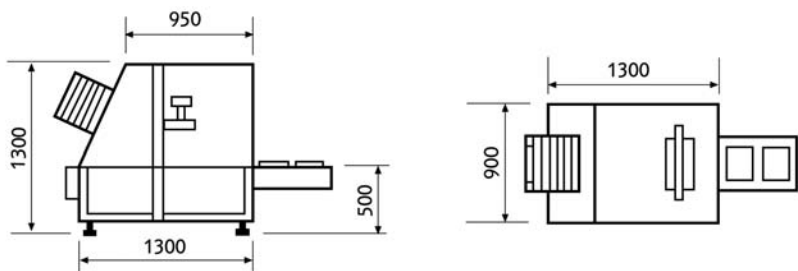

Capable of erecting up to 50 trays per minute (subject to machine type)

Total length up to 500mm

Total Width up to 500mm

Max Wall Height 100mm

Other sizes not shown can be run with modification (subject to quotation). Restrictions apply to certain combinations of sizes.



MAIN FEATURES

- Glue jet applicator ensuring consistent, economical and reliable flap sealing
- Full safety interlock system to give easy access to the machine while being safe and simple to operate
- Simple and easy size change
- For use with a wide variety of adhesives and carton materials
- Mainly stainless steel and aluminium construction
- Suitable for use with a wide range of tray shapes and styles for shelf ready applications
- Sealed for life gearboxes and bearings throughout to cut down on routine maintenance
- Built to stringent quality control procedures to ensure customer satisfaction
- Simple and easy to understand machine controls
- Available on a wide range of options and specifications to suit individual customer requirements

“We have built our reputation on a number of core values - quality, reliability and innovation. The experience of our technical engineers and their focus on customer satisfaction has created a product range that is simple, robust, hygienic and can be applied to most sectors including food, cosmetics, household goods and healthcare.”

DUE TO THE T. FREEMANTLE LTD POLICY OF CONTINUED DEVELOPMENT & IMPROVEMENT, WE RESERVE THE RIGHT TO MODIFY PRODUCTS WITHOUT PRIOR NOTICE.

Designers & Manufacturers of
Fine Quality Packaging Machinery

T.FREEMANTLE LIMITED
Atkinson Way, Foxhills Industrial Park
Scunthorpe, DN15 8QJ UK

T +44 (0)1724 276908
F +44 (0)1724 276909
E sales@tfremantle.com

