

TWO FLAP SEALER



www.tfreemantle.com



Shown here with optional In Line Kick Off unit

FUNCTION

The operator manually erects and loads the carton with the product. The carton is then placed into the infeed rails of the machine and pushed forwards. The carton is automatically detected and applied with glue then folded and sealed at both ends before being ejected through the top of the machine.

TWO FLAP SEALER



www.tfremantle.com


Technical Details

- Electrical requirements** Supplied with a 3 metre armoured cable complete with a BS 4343 plug for connection to a single phase 13 amp supply
- Compressed Air** Supplied with filter regulator with 8mm push in fitting for connection to 80psi/5.5bar compressed air supply
- Lifting weight** 250 kilos. Ideal lifting points marked for fork truck offloading
- Adhesive type** Standard packaging grade Hot Melt or Coolmelt glue

Alternative specifications available for worldwide installations.

Optional Items

- In line kick off to push off each carton as it exits the top of the machine.
- Deboss or Contact Ink code unit to apply best before dates and batch codes

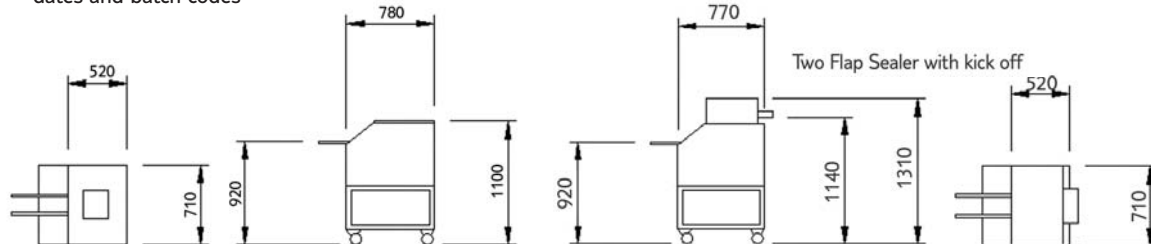

	Capable of sealing up to 25 cartons per minute	
	Fully adjustable for a wide range of carton sizes	
	X - 80 to 300mm Y - 50 to 250mm Z - 20 to 100mm	Other sizes not shown can be run with modification (subject to quotation). Restrictions apply to certain combinations of sizes.



MAIN FEATURES

- Vertical lift flap folding to ensure a consistently square box
- Full safety interlock system to give easy access to the machine while being safe and simple to operate
- Simple and easy size change
- Economical spot glue applicator for use with a wide variety of adhesives and carton materials
- Built on a one piece stainless steel frame fitted with castors making the machine both robust and easily mobile
- Fitted with ISO standard maintenance free pneumatics
- Suitable for use with a wide range of carton shapes and styles including widow cartons, tear strip and reseal designs
- Built to stringent quality control procedures to ensure customer satisfaction
- Simple and easy to understand machine controls
- Available with a wide range of options and specifications to suit individual customer requirements

“We have built our reputation on a number of core values - quality, reliability and innovation. The experience of our technical engineers and their focus on customer satisfaction has created a product range that is simple, robust, hygienic and can be applied to most sectors including food, cosmetics, household goods and healthcare.”

DUE TO THE T. FREEMANTLE LTD POLICY OF CONTINUED DEVELOPMENT & IMPROVEMENT, WE RESERVE THE RIGHT TO MODIFY PRODUCTS WITHOUT PRIOR NOTICE.

Designers & Manufacturers of
Fine Quality Packaging Machinery



T.FREEMANTLE LIMITED
Atkinson Way, Foxhills Industrial Park
Scunthorpe, DN15 8QJ UK

T +44 (0)1724 276908
F +44 (0)1724 276909
E sales@tfremantle.com